


Features:

- Two-way active speaker with one 8" woofer and one 1" driver.
- Cabinet is made from polypropylene and special high-tech material. It's durable, anti-shock and has good damping characters.
- Voice coil in the 8" woofer is made from $\varnothing 35\text{mm}$ copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- Rotatable $90^\circ \times 60^\circ$ (HxV) dispersion horn makes it suitable for any performance purposes.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.



Beta Three

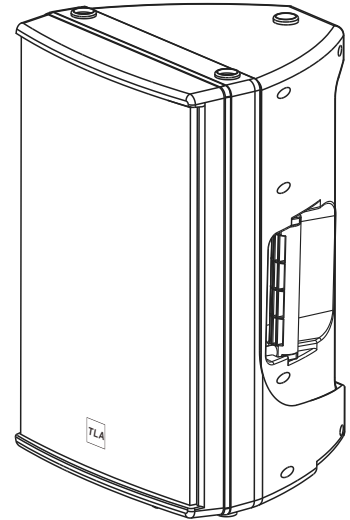


Model: N8a

Technical Parameters

System:	Built-in crossover two way full range active speaker
Driver Quantity:	8"x1(Bass) 1 x 1.3" driver
Frequency Response(-3dB):	65Hz-18KHz
Frequency Response(-10dB):	55Hz-18KHz
Max Sound Level(dB/1M):	110dB
Level Adjust Range:	$\pm 10\text{dB}(100\text{Hz})$ - Bass $\pm 10\text{dB}(10\text{KHz})$ - Treb
Amplifier Power Output:	150W
Distortion:	Line-0.02%, Microphone-0.04%
Tweeter Dispersion(HxV):	$90^\circ \times 60^\circ$
Load Impedance:	8
Input Impedance:	Line - 20KOhm, Microphone - 10KOhm
Connectors:	2 x XLR
Power Supply:	AC 220V-240V~, 50/60Hz (or AC 110V-120V~, 50/60Hz)
Dimensions(WxDxH mm/pcs):	277X265X407mm
Packing Dimensions(WxDxH mm/pair)	595X310X460mm
Net Weight(Kg/pcs):	8.6Kg
Gross Weight(Kg/pair):	18.6Kg



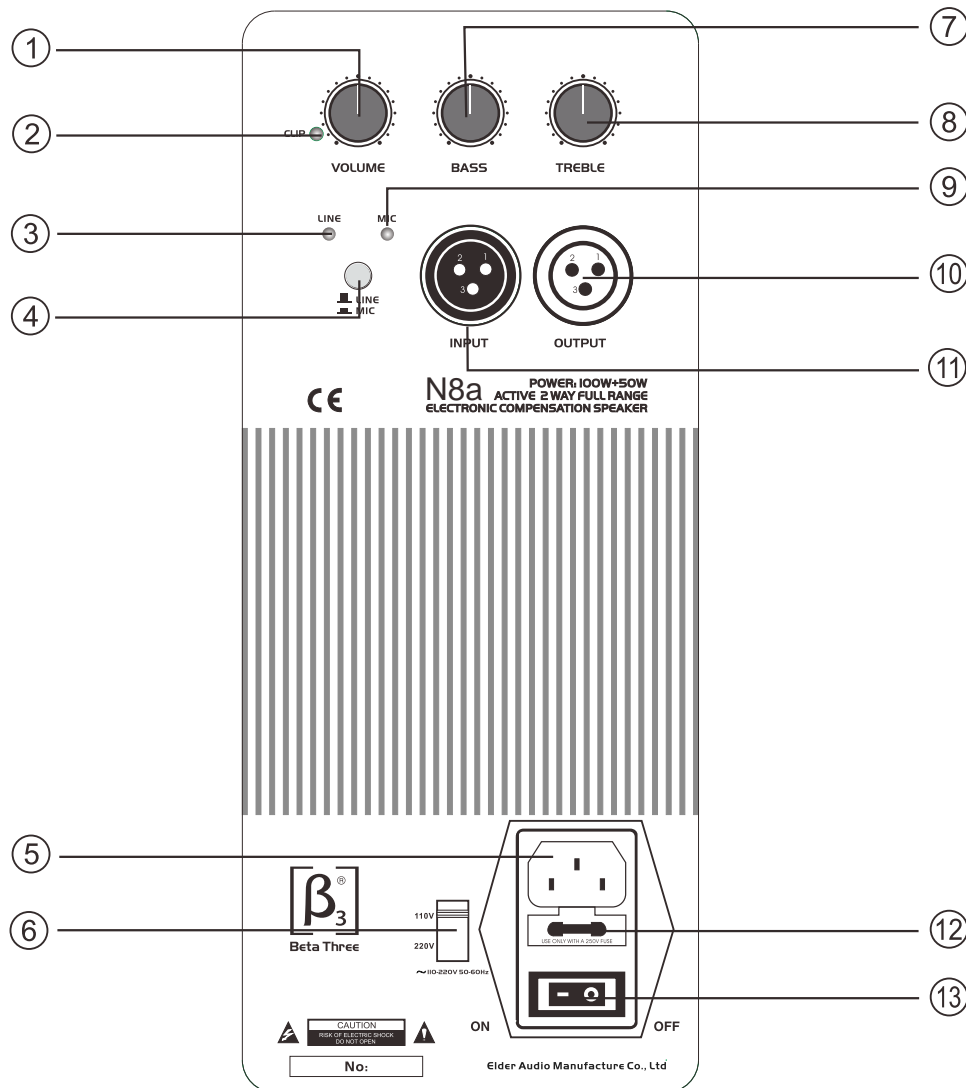

- | | |
|--|---|
| <ol style="list-style-type: none"> 1. Volume control 2. Clip indicator. 3. Line input signal presence indicator. 4. Line/microphone selector. 5. Power supply input. Make sure that the voltage selector is set for your country's correct voltage. 6. 110V/220V voltage input selector. 7. Bass control. | <ol style="list-style-type: none"> 8. Treble control. 9. Microphone input signal presence indicator. 10. Line/microphone output. 11. Line/microphone input. 12. Protection fuse. Use only fuses of the correct amp rating. 13. Power ON/OFF switch. |
|--|---|

Cosmetic changes may be made