


Features:

- Two-way passive speaker with one 6.5" woofer and one 1" driver.
- Cabinet is made from polypropylene and special high-tech material in large injection mold. It's durable, anti-shock and has good damping characters.
- Voice coil in the 6.5" woofer is made from $\varnothing 30$ mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- The high frequency driver is protected by special design circuit to avoid being damaged when overload.
- Rotatable 90° x 60° (HxV) dispersion horn makes it suitable for any performance purposes.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.




Model:U6

Technical Parameters


System:	Built-in Crossover Two Way Full Range Speaker	
Driver Quantity:	6.5 "x1(Bass)	1x1" Driver
Frequency Response(-3dB):	80Hz-18KHz	
Frequency Response(-10dB):	65Hz-20KHz	
Sensitivity(dB/1M/1W):	91 dB	
Impedance:	8 Ohm	
Recommendatory Power(RMS/W):	80 W	
Max Sound Level(dB/1M):	110dB	
Tweeter Dispersion(HxV):	90x60°	
Harmonic Distortion:	≤1%	
Connectors:	1xNL4	
Dimensions(WxDxH mm/pcs):	225X211X325 mm	
Packing Dimensions(WxDxH mm/pair):	480X255X380mm	
Net Weight(Kg/pcs):	5.6Kg	
Gross Weight(Kg/pair):	13.2Kg	

PROFESSIONAL AUDIO SYSTEM


U6

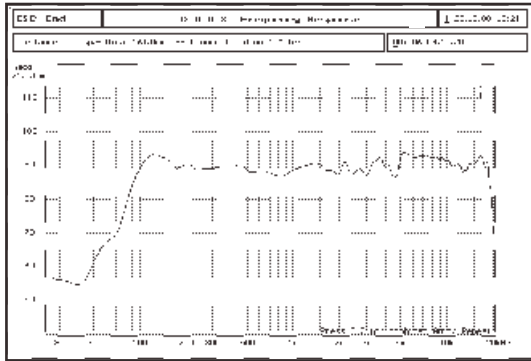


Frequency response, SPL/2.83v

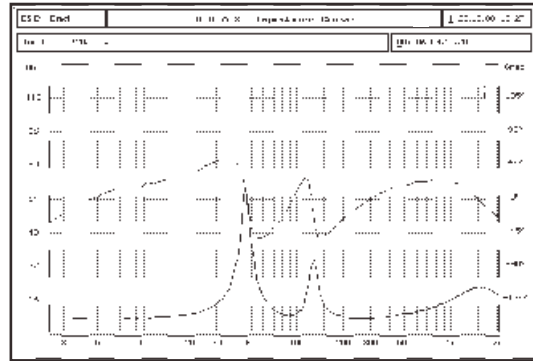



Impedance curve

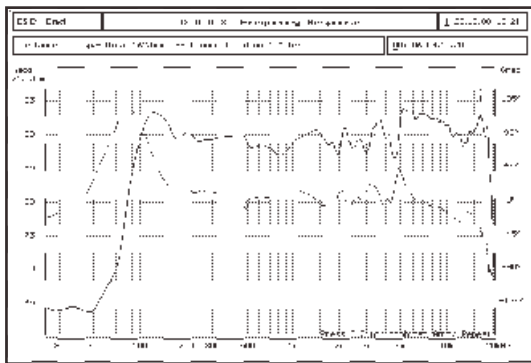

Harmonic distortion 106dB/2.5m, nominal impedance

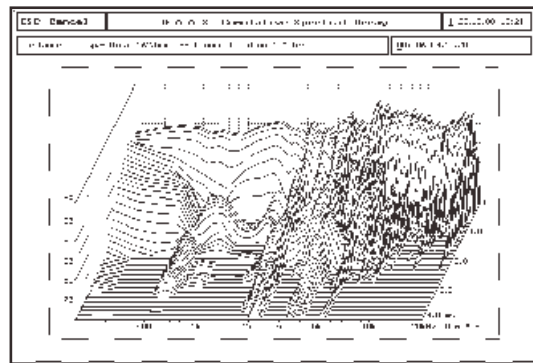

Waterfall spectrum analysis

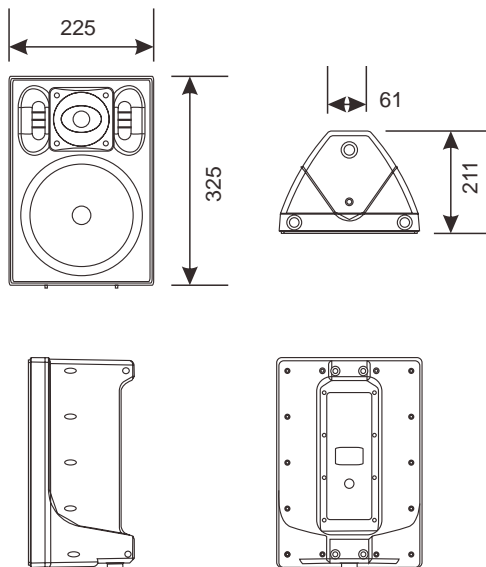

Two Way Crossover

Cosmetic changes may be made