


## Features:

- Two-way passive speaker with one 10" woofer and one 1.5" driver.
- Cabinet is made from polypropylene and special high-tech material in large injection mold. It's durable, anti-shock and has good damping characters.
- Voice coil in the 10" woofer is made from 75mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- The high frequency driver is protected by special design circuit to avoid being damaged when overload.
- Rotatable 90° x 60° (HxV) dispersion horn makes it suitable for any performance purposes.
- Molded-in pole mount, easily suspended.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.

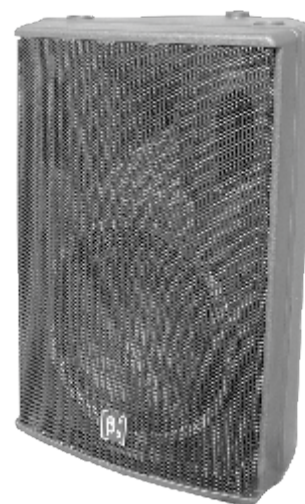


## Model:N10


### Technical Parameters

System:	Built-in Crossover Two Way Full Range Speaker
Driver Quantity:	1x10" (Bass), 1 x 1.3" Driver
Frequency Response(-3dB):	65Hz-18KHz
Frequency Response(-10dB):	55Hz-20KHz
Sensitivity(dB/1M/1W):	95 dB
Maximum SPL (1W @ 1m) :	
Impedance:	8 Ohm
Recommendatory Power(RMS/W):	250 W
Tweeter Dispersion(HxV):	90°x60°
Harmonic Distortion:	≤1%
Connectors:	2xNL4
Dimensions(WxDxH mm/pcs):	321x321x464mm
Packing Dimensions(WxDxH mm/pcs)	375x355x535mm
Net Weight(Kg/pcs):	10Kg
Gross Weight(Kg/pcs):	12.0Kg




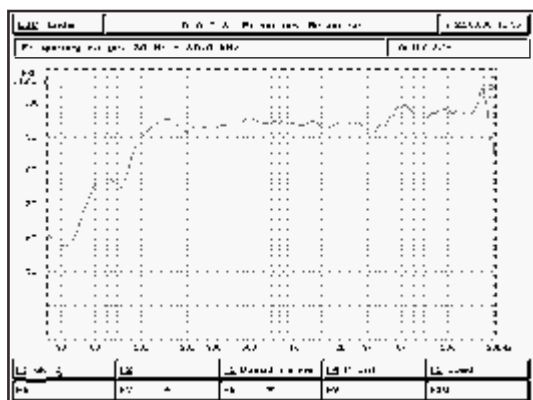


Frequency response, SPL/2.83v

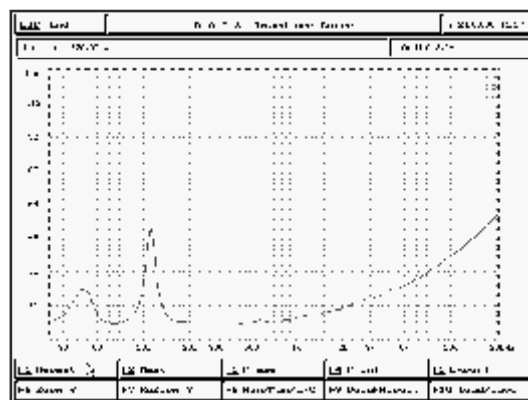



Impedance curve

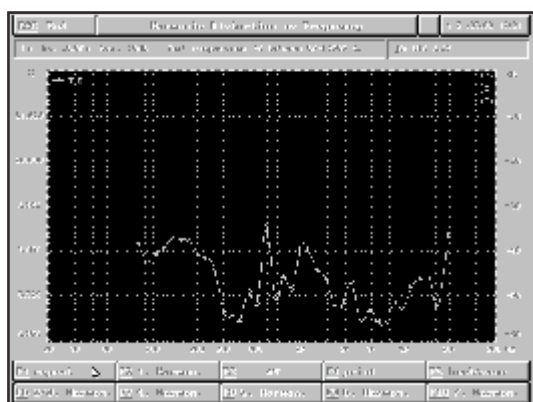

Harmonic distortion 106dB/2.5m, nominal impedance

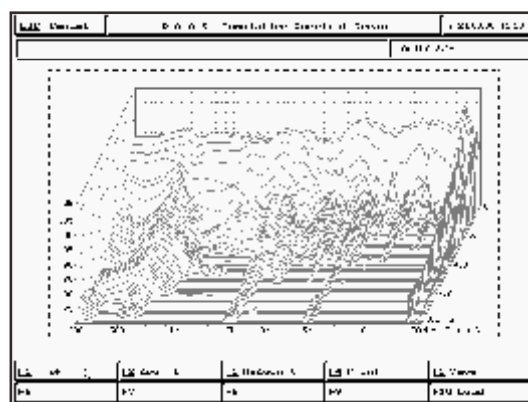

Waterfall spectrum analysis

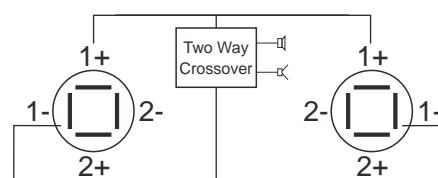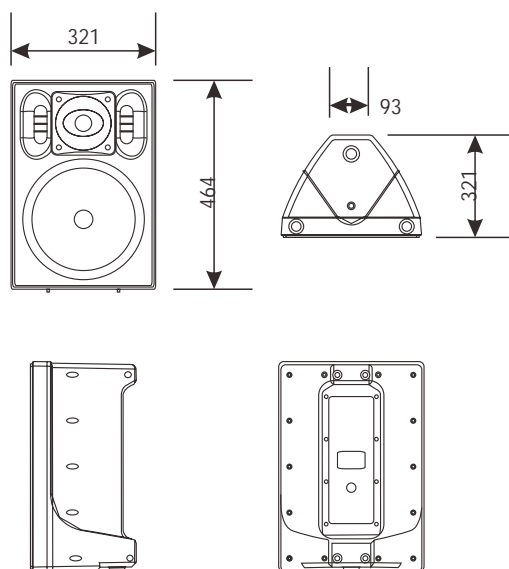

Two Way Crossover

Cosmetic changes may be made